




Straight Tees
SCHEDULE 80
Inches / Pounds

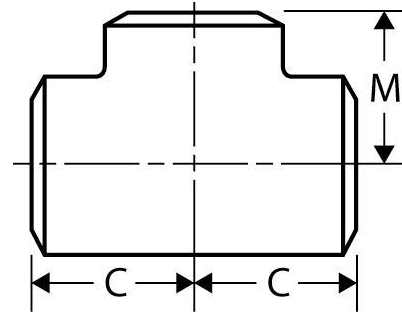

Nominal Pipe Size	Outside Diameter	Inside Diameter	Wall Thickness	Center To End (C)	Center To End (M)	Pipe Schedule	Approximate Weight (in Pounds)
1/2	0.840	0.546	0.147	1.00	1.00	XH/80	0.37
3/4	1.050	0.742	0.154	1.12	1.12	XH/80	0.58
1	1.315	0.957	0.179	1.50	1.50	XH/80	0.87
1 1/4	1.660	1.278	0.191	1.88	1.88	XH/80	1.6
1 1/2	1.900	1.500	0.200	2.25	2.25	XH/80	2.3
2	2.375	1.939	0.218	2.50	2.50	XH/80	3.9
2 1/2	2.875	2.323	0.276	3.00	3.00	XH/80	6.5
3	3.500	2.900	0.300	3.38	3.38	XH/80	9
3 1/2	4.000	3.364	0.318	3.75	3.75	XH/80	12.2
4	4.500	3.826	0.337	4.12	4.12	XH/80	16.2
5	5.563	4.813	0.375	4.88	4.88	XH/80	26.6
6	6.625	5.761	0.432	5.62	5.62	XH/80	41.8
8	8.625	7.625	0.500	7.00	7.00	XH/80	76.2
10	10.750	9.562	0.594	8.50	8.50	80	137
12	12.750	11.374	0.688	10.00	10.00	80	233
14	14.000	12.500	0.750	11.00	11.00	80	356
16	16.000	14.312	0.844	12.00	12.00	80	479
18	18.000	16.124	0.938	13.50	13.50	80	662
20	20.000	17.938	1.031	15.00	15.00	80	911
24	24.000	21.562	1.219	17.00	17.00	80	1524

** Dimensions conform to ASME B16.9 & material conforms to ASTM SA-234 Grade B.*