




The Best Products, The Best Service...

SERVICE METAL

ONE CALL GETS IT ALL

Slip-On Flange CLASS 150 Inches / Pounds

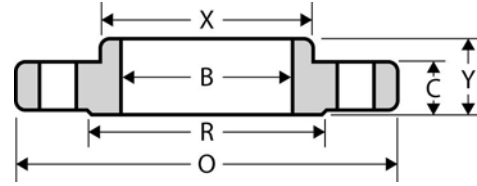

| Nominal Pipe Size | Outside Diam. of Flange (O) | Thick. of Flange (C) | Diam. of Raised Face (R) | Diam. of Hub at Base (X) | Length thru Hub (Y) | Diam. of Bore (B) | No. of Holes | Diam. of Holes | Diam. of Bolts | Diam. of Bolt Circle | Approx. Weight (in Pounds) |
|-------------------|-----------------------------|----------------------|--------------------------|--------------------------|---------------------|-------------------|--------------|----------------|----------------|----------------------|----------------------------|
| 1/2 | 3.50 | 0.44 | 1.38 | 1.19 | 0.62 | 0.88 | 4 | 0.62 | 0.50 | 2.38 | 1 |
| 3/4 | 3.88 | 0.50 | 1.69 | 1.50 | 0.62 | 1.09 | 4 | 0.62 | 0.50 | 2.75 | 2 |
| 1 | 4.25 | 0.56 | 2.00 | 1.94 | 0.69 | 1.36 | 4 | 0.62 | 0.50 | 3.12 | 2 |
| 1 1/4 | 4.62 | 0.62 | 2.50 | 2.31 | 0.81 | 1.70 | 4 | 0.62 | 0.50 | 3.50 | 3 |
| 1 1/2 | 5.00 | 0.69 | 2.88 | 2.56 | 0.88 | 1.95 | 4 | 0.62 | 0.50 | 3.88 | 3 |
| 2 | 6.00 | 0.75 | 3.62 | 3.06 | 1.00 | 2.44 | 4 | 0.75 | 0.62 | 4.75 | 5 |
| 2 1/2 | 7.00 | 0.88 | 4.12 | 3.56 | 1.12 | 2.94 | 4 | 0.75 | 0.62 | 5.50 | 7 |
| 3 | 7.50 | 0.94 | 5.00 | 4.25 | 1.19 | 3.57 | 4 | 0.75 | 0.62 | 6.00 | 8 |
| 3 1/2 | 8.50 | 0.94 | 5.50 | 4.81 | 1.25 | 4.07 | 8 | 0.75 | 0.62 | 7.00 | 11 |
| 4 | 9.00 | 0.94 | 6.19 | 5.31 | 1.31 | 4.57 | 8 | 0.75 | 0.62 | 7.50 | 13 |
| 5 | 10.00 | 0.94 | 7.31 | 6.44 | 1.44 | 5.66 | 8 | 0.88 | 0.75 | 8.50 | 15 |
| 6 | 11.00 | 1.00 | 8.50 | 7.56 | 1.56 | 6.72 | 8 | 0.88 | 0.75 | 9.50 | 19 |
| 8 | 13.50 | 1.12 | 10.62 | 9.69 | 1.75 | 8.72 | 8 | 0.88 | 0.75 | 11.75 | 30 |
| 10 | 16.00 | 1.19 | 12.75 | 12.00 | 1.94 | 10.88 | 12 | 1.00 | 0.88 | 14.25 | 43 |
| 12 | 19.00 | 1.25 | 15.00 | 14.38 | 2.19 | 12.88 | 12 | 1.00 | 0.88 | 17.00 | 64 |
| 14 | 21.00 | 1.38 | 16.25 | 15.75 | 2.25 | 14.14 | 12 | 1.12 | 1.00 | 18.75 | 90 |
| 16 | 23.50 | 1.44 | 18.50 | 18.00 | 2.50 | 16.16 | 16 | 1.12 | 1.00 | 21.25 | 98 |
| 18 | 25.00 | 1.56 | 21.00 | 19.88 | 2.69 | 18.18 | 16 | 1.25 | 1.12 | 22.75 | 130 |
| 20 | 27.50 | 1.69 | 23.00 | 22.00 | 2.88 | 20.20 | 20 | 1.25 | 1.12 | 25.00 | 165 |
| 24 | 32.00 | 1.88 | 27.25 | 26.12 | 3.25 | 24.25 | 20 | 1.38 | 1.25 | 29.50 | 220 |

* Dimensions conform to ASTM A/SA-105; ANSI B16.5