




Reducing Companion Flanges

125# Cast Iron
Inches / Pounds

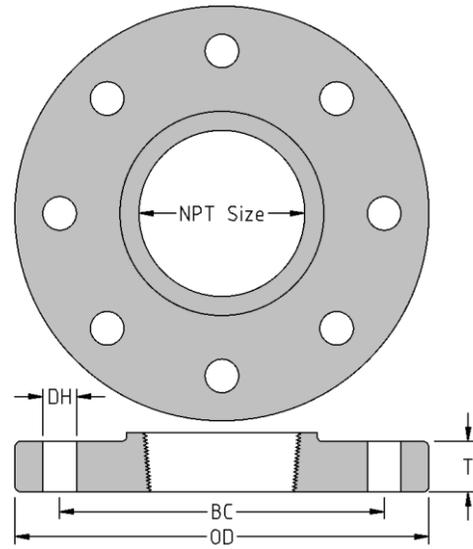

| Size | Diameter Holes | # of Holes | Outside Diameter (OD) | Bolt Circle (BC) | Thickness (T) | Flange Weights (in Pounds) |
|------------|----------------|------------|-----------------------|------------------|---------------|----------------------------|
| 1 x 4-5/8 | 0.62 | 4 | 4.62 | 3.50 | 0.50 | 3 |
| 1 x 5 | 0.62 | 4 | 5.00 | 3.88 | 0.56 | 3 |
| 1 x 6 | 0.75 | 4 | 6.00 | 4.75 | 0.62 | 5 |
| 1 x 7 | 0.75 | 4 | 7.00 | 5.50 | 0.69 | 7 |
| 1 ¼ x 6 | 0.75 | 4 | 6.00 | 6.00 | 0.75 | 4 |
| 1 ½ x 6 | 0.75 | 4 | 6.00 | 6.00 | 0.75 | 4 |
| 1 ½ x 7 | 0.75 | 4 | 7.00 | 5.50 | 0.69 | 6 |
| 1 ½ x 7 ½ | 0.75 | 4 | 7.50 | 6.00 | 0.75 | 9 |
| 1 ½ x 9 | 0.75 | 8 | 9.00 | 7.50 | 0.94 | 15 |
| 1 ½ x 10 | 0.88 | 8 | 10.00 | 8.50 | 0.94 | 19 |
| 1 ½ x 11 | 0.88 | 8 | 11.00 | 9.50 | 1.00 | 24 |
| 2 x 7 | 0.75 | 4 | 7.00 | 5.50 | 0.69 | 7 |
| 2 x 7 ½ | 0.75 | 4 | 7.50 | 6.00 | 0.75 | 8 |
| 2 x 8 ½ | 0.75 | 8 | 8.50 | 7.00 | 0.81 | 10 |
| 2 x 9 | 0.75 | 8 | 9.00 | 7.50 | 0.94 | 16 |
| 2 x 10 | 0.88 | 8 | 10.00 | 8.50 | 0.94 | 17 |
| 2 x 11 | 0.88 | 8 | 11.00 | 9.50 | 1.00 | 23 |
| 2 x 13 ½ | 0.88 | 8 | 13.50 | 11.75 | 1.12 | 44 |
| 2 x 16 | 1.00 | 12 | 16.00 | 14.25 | 1.19 | 60 |
| 2 x 19 | 1.00 | 12 | 19.00 | 17.00 | 1.25 | 87 |
| 2 ½ x 7 ½ | 0.75 | 4 | 7.50 | 6.00 | 0.75 | 8 |
| 2 ½ x 9 | 0.75 | 8 | 9.00 | 7.50 | 0.94 | 13 |
| 2 ½ x 10 | 0.88 | 8 | 10.00 | 8.50 | 0.94 | 18 |
| 2 ½ x 11 | 0.88 | 8 | 11.00 | 9.50 | 1.00 | 22 |
| 2 ½ x 13 ½ | 0.88 | 8 | 13.50 | 11.75 | 1.12 | 40 |



| Size | Diameter Holes | # of Holes | Outside Diameter (OD) | Bolt Circle (BC) | Thickness (T) | Flange Weights (in Pounds) |
|------------|----------------|------------|-----------------------|------------------|---------------|----------------------------|
| 3 x 9 | 0.75 | 8 | 9.00 | 7.50 | 0.94 | 13 |
| 3 x 10 | 0.88 | 8 | 10.00 | 8.50 | 0.94 | 17 |
| 3 x 11 | 0.88 | 8 | 11.00 | 9.50 | 1.00 | 21 |
| 3 x 13 ½ | 0.88 | 8 | 13.50 | 11.75 | 1.12 | 37 |
| 3 ½ x 11 | 0.88 | 8 | 11.00 | 9.50 | 1.00 | 22 |
| 3 ½ x 13 ½ | 0.88 | 8 | 13.50 | 11.75 | 1.12 | 39 |
| 4 x 10 | 0.88 | 8 | 10.00 | 8.50 | 0.94 | 14 |
| 4 x 11 | 0.88 | 8 | 11.00 | 9.50 | 1.00 | 21 |
| 4 x 13 ½ | 0.88 | 8 | 13.50 | 11.75 | 1.12 | 35 |
| 5 x 11 | 0.88 | 8 | 11.00 | 9.50 | 1.00 | 20 |
| 5 x 13 ½ | 0.88 | 8 | 13.50 | 11.75 | 1.12 | 32 |
| 6 x 13 ½ | 0.88 | 8 | 13.50 | 11.75 | 1.12 | 30 |
| 6 x 16 | 1.00 | 12 | 16.00 | 14.25 | 1.19 | 55 |
| 8 x 16 | 1.00 | 12 | 16.00 | 14.25 | 1.19 | 45 |
| 8 x 19 | 1.00 | 12 | 19.00 | 17.00 | 1.25 | 76 |
| 10 x 19 | 1.00 | 12 | 19.00 | 17.00 | 1.25 | 68 |

****Flange Dimensions Listed Above Apply to Both 125# Cast Iron and 150# Ductile Iron***

****Threads for Companion Flanges Conform to ANSI/ASME B1.20.1 NPT***

****All Flanges are Asphalt Coated as Standard, Hot Dip Galvanizing Available***