




Coupling
150# Malleable Iron
Inches / Pounds

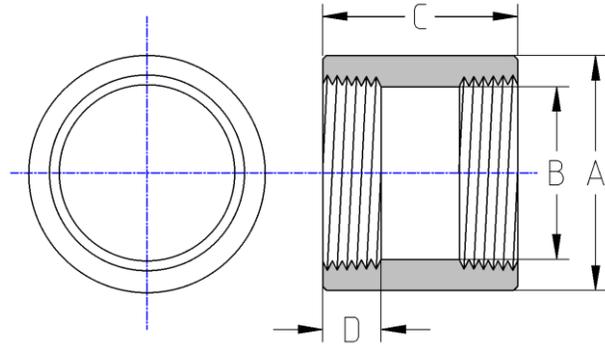

Nominal Pipe Size	Outside Diameter Min. (A)	Inside Diameter (B) Min/Max	End to End (C)	Internal Thread Length Min. (D)	Nominal Metal Thickness	Approx. Weight (in Pounds)
1/8	0.69	0.54 / 0.58	0.96	0.25	0.09	0.06
1/4	0.84	0.67 / 0.72	1.06	0.32	0.09	0.09
3/8	1.01	0.84 / 0.90	1.16	0.36	0.10	0.13
1/2	1.20	1.05 / 1.11	1.34	0.43	0.10	0.20
3/4	1.46	1.31 / 1.38	1.52	0.50	0.12	0.29
1	1.77	1.66 / 1.73	1.67	0.58	0.13	0.48
1 1/4	2.15	1.90 / 1.97	1.93	0.67	0.14	0.74
1 1/2	2.43	2.37 / 2.44	2.15	0.70	0.15	1.00
2	2.96	2.87 / 2.97	2.53	0.75	0.17	1.45
2 1/2	3.59	3.50 / 3.60	2.88	0.92	0.21	2.40
3	4.28	4.50 / 4.60	3.18	0.98	0.23	3.30
3 1/2	4.84	4.00/4.10	3.50	1.03	0.25	4.80
4	5.40	0.54 / 0.58	3.69	1.08	0.26	5.65
5	6.58	5.56/566	3.75	1.26	0.30	6.90
6	7.36	6.62/6.70	4.75	1.28	0.34	13.30

- *Malleable Castings conform to ASTM A197**
- *Hot-Dipped Galvanized Fittings conform to ASTM A153**
- *Malleable Fitting Dimensions conform to ASME B16.3**
- *Malleable Bushings, Plugs and Locknuts conform to ASME B16.14**
- *Malleable Unions conform to ASME B16.39**
- *NPT Threads on all fittings conform to ASME B1.20.1**