




Threaded 45° Elbow  
**2000# Forged Steel**  
Inches / Pounds

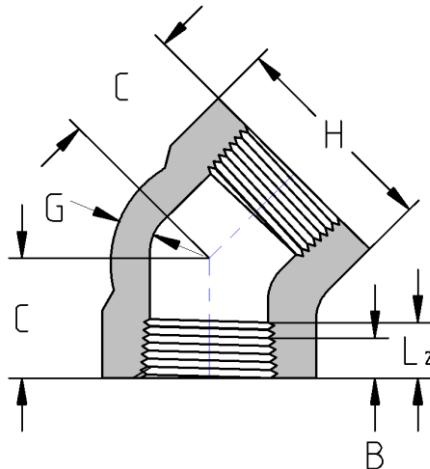

Size	C	H	G (min)	B**	L <sub>2</sub> ** (min)	Approximate Weight (in Pounds)
1/4	0.69	0.88	0.125	0.32	0.4018	0.29
5/8	0.75	1.00	0.125	0.36	0.4078	0.27
1/2	0.88	1.31	0.125	0.43	0.5337	0.42
3/4	1.00	1.50	0.125	0.50	0.5457	0.60
1	1.12	1.81	0.145	0.58	0.6828	0.97
1 1/4	1.31	2.19	0.153	0.67	0.7068	1.35
1 1/2	1.38	2.44	0.158	0.70	0.7235	1.83
2	1.69	2.97	0.168	0.75	0.7565	3.08
2 1/2	2.06	3.62	0.221	0.93	1.1380	7.84
3	2.50	4.31	0.236	1.02	1.2000	13.5

\*ASME B16.11

\*\*Dimension B is minimum length of perfect thread. The length of useful thread (B plus threads with fully formed roots and flat crests) shall not be less than L<sub>2</sub> (effective length of external thread) required by ASME B1.20.1