




Threaded Cross
3000# Forged Steel
Inches / Pounds

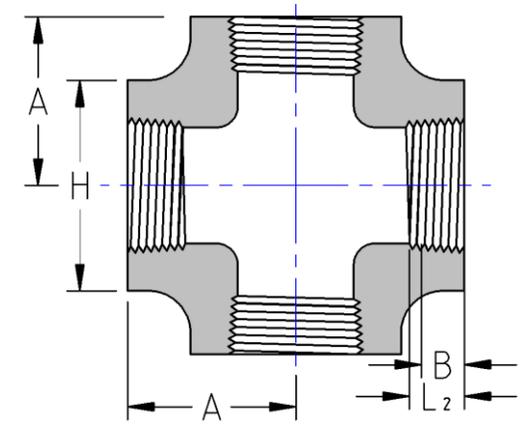

Nominal pipe size	A	H	G ¹ (Minimum)	B ^{**}	L ₂ ^{**} (Minimum)	Approximate Weight (in Pounds)
1/8	0.81	0.88	0.125	0.25	0.2639	0.42
1/4	0.97	1.00	0.130	0.32	0.4018	0.52
3/8	1.12	1.31	0.138	0.36	0.4078	0.98
1/2	1.31	1.50	0.161	0.43	0.5337	1.48
3/4	1.50	1.81	0.170	0.50	0.5457	2.52
1	1.75	2.19	0.196	0.58	0.6828	3.58
1 1/4	2.00	2.44	0.208	0.67	0.7068	4.10
1 1/2	2.38	2.97	0.219	0.70	0.7235	6.55
2	2.50	3.31	0.281	0.75	0.7565	8.12
2 1/2	3.27	4.00	0.301	0.93	1.1380	16.88
3	3.74	4.75	0.348	1.02	1.2000	18.56

***ASME B16.11**

****Dimension B is minimum length of perfect thread. The length of useful thread (B plus threads with fully formed roots and flat crests) shall not be less than L₂ (effective length of external thread) required by ASME B1.20.1**

¹Dimension G is the minimum wall thickness.