




Long Radius 90° Elbows
EXTRA HEAVY
Inches / Pounds

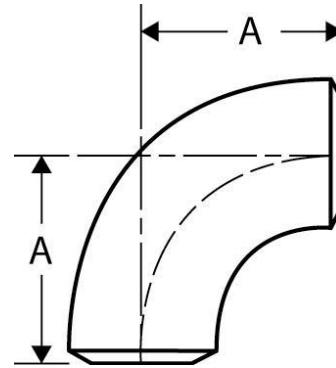

Nominal Pipe Size	Outside Diameter	Inside Diameter	Wall Thickness	Center to End (A)	Pipe Schedule	Approximate Weight (in Pounds)
1/2	0.840	0.546	0.147	1.50	XH/80	0.26
3/4	1.050	0.742	0.154	1.50	XH/80	0.29
1	1.315	0.957	0.179	1.50	XH/80	0.48
1 1/4	1.660	1.278	0.191	1.88	XH/80	0.79
1 1/2	1.900	1.500	0.200	2.25	XH/80	1.2
2	2.375	1.939	0.218	3.00	XH/80	2.1
2 1/2	2.875	2.323	0.276	3.75	XH/80	3.8
3	3.500	2.900	0.300	4.50	XH/80	6.3
3 1/2	4.000	3.364	0.318	5.25	XH/80	8.6
4	4.500	3.826	0.337	6.00	XH/80	12.5
5	5.563	4.813	0.375	7.50	XH/80	21.2
6	6.625	5.761	0.432	9.00	XH/80	34.4
8	8.625	7.625	0.500	12.00	XH/80	71.3
10	10.75	9.750	0.500	15.00	XH/60	111
12	12.75	11.75	0.500	18.00	XH*	158
14	14.00	13.00	0.500	21.00	XH*	201
16	16.00	15.00	0.500	24.00	XH/40	270
18	18.00	17.00	0.500	27.00	XH*	348
20	20.00	19.00	0.500	30.00	XH/30	422
22	22.00	21.00	0.500	33.00	XH*	508
24	24.00	23.00	0.500	36.00	XH*	604
26	26.00	25.00	0.500	39.00	XH*	713
30	30.00	29.00	0.500	45.00	XH/20	997
34	34.00	33.00	0.500	51.00	XH/20	1,230
36	36.00	35.00	0.500	54.00	XH/20	1,380
42	42.00	41.00	0.500	63.00	XH*	1,880
48	48.00	47.00	0.500	72.00	XH*	2,502

** XH* designates Extra Strong (extra strong wall). This size and thickness do not correspond to any pipe schedule number.*

** Dimensions conform to ASME B16.9 & material conforms to ASTM SA-234 Grade B.*