




Reducing Tees  
**XXH Weight**  
Inches / Pounds



Nominal Pipe Size	Dimensions of Run				Dimensions of Branch				Approximate Weight (in Pounds)
	Outside Diameter	Inside Diameter	Wall Thickness	Center to End (C)	Outside Diameter	Inside Diameter	Wall Thickness	Center to End (M)	
3/4 x 1/2	1.030	0.414	0.308	1.12	0.840	0.252	0.294	1.12	-
1 x 1/2	1.315	0.599	0.358	1.50	0.840	0.252	0.294	1.50	-
1 x 3/4	1.315	0.599	0.358	1.50	1.030	0.414	0.308	1.50	-
1 1/4 x 1/2	1.660	0.896	0.382	1.88	0.840	0.252	0.294	1.88	-
1 1/4 x 3/4	1.660	0.896	0.382	1.88	1.030	0.414	0.308	1.88	-
1 1/4 x 1	1.660	0.896	0.382	1.88	1.315	0.599	0.358	1.88	-
1 1/2 x 1/2	1.900	1.100	0.400	2.25	0.840	0.252	0.294	2.25	-
1 1/2 x 3/4	1.900	1.100	0.400	2.25	1.030	0.414	0.308	2.25	-
1 1/2 x 1	1.900	1.100	0.400	2.25	1.315	0.599	0.358	2.25	-
1 1/2 x 1 1/4	1.900	1.100	0.400	2.25	1.660	0.896	0.382	2.25	-
2 x 3/4	2.375	1.499	0.438	2.50	1.030	0.414	0.308	1.75	-
2 x 1	2.375	1.499	0.438	2.50	1.315	0.599	0.358	2.00	-
2 x 1 1/4	2.375	1.499	0.438	2.50	1.660	0.896	0.382	2.25	-
2 x 1 1/2	2.375	1.499	0.438	2.50	1.900	1.100	0.400	2.38	-
2 1/2 x 1	2.875	1.771	0.552	3.00	1.315	0.599	0.358	2.25	-
2 1/2 x 1 1/4	2.875	1.771	0.552	3.00	1.660	0.896	0.382	2.50	-
2 1/2 x 1 1/2	2.875	1.771	0.552	3.00	1.900	1.100	0.400	2.62	-
2 1/2 x 2	2.875	1.771	0.552	3.00	2.375	1.499	0.438	2.75	-
3 x 1 1/4	3.500	2.300	0.600	3.38	1.660	0.896	0.382	2.75	-
3 x 1 1/2	3.500	2.300	0.600	3.38	1.900	1.100	0.400	2.88	-
3 x 2	3.500	2.300	0.600	3.38	2.375	1.499	0.438	3.00	-
3 x 2 1/2	3.500	2.300	0.600	3.38	2.875	1.771	0.552	3.25	-
4 x 1 1/2	4.500	3.152	0.674	4.12	1.900	1.100	0.400	3.38	-
4 x 2	4.500	3.152	0.674	4.12	2.375	1.499	0.438	3.50	-
4 x 2 1/2	4.500	3.152	0.674	4.12	2.875	1.771	0.552	3.75	-
4 x 3	4.500	3.152	0.674	4.12	3.500	2.300	0.600	3.88	-
4 x 3 1/2	4.500	3.152	0.674	4.12	4.000	2.728	0.636	4.00	-

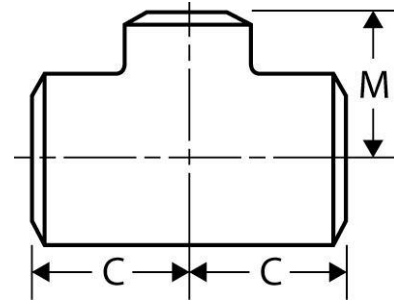

**Reducing Tees –XXH Weight (Continued)**

Nominal Pipe Size	Dimensions of Run				Dimensions of Branch				Approximate Weight (in Pounds)
	Outside Diameter	Inside Diameter	Wall Thickness	Center to End (C)	Outside Diameter	Inside Diameter	Wall Thickness	Center to End (M)	
5 x 2	5.562	4.062	0.750	4.88	2.375	1.499	0.438	4.12	–
5 x 2 ½	5.562	4.062	0.750	4.88	2.875	1.771	0.552	4.25	–
5 x 3	5.562	4.062	0.750	4.88	3.500	2.300	0.600	4.38	–
5 x 3 ½	5.562	4.062	0.750	4.88	4.000	2.728	0.636	4.50	–
5 x 4	5.562	4.062	0.750	4.88	4.500	3.152	0.674	4.62	–
6 x 2	6.625	4.897	0.864	5.62	2.375	1.499	0.438	–	–
6 x 2 ½	6.625	4.897	0.864	5.62	2.875	1.771	0.552	4.75	–
6 x 3	6.625	4.897	0.864	5.62	3.500	2.300	0.600	4.88	–
6 x 3 ½	6.625	4.897	0.864	5.62	4.000	2.728	0.636	5.00	–
6 x 4	6.625	4.897	0.864	5.62	4.500	3.152	0.674	5.12	–
6 x 5	6.625	4.897	0.864	5.62	5.562	4.062	0.750	5.38	–
8 x 3	8.625	6.875	0.875	7.00	3.500	2.300	0.600	–	–
8 x 3 ½	8.625	6.875	0.875	7.00	4.000	2.728	0.636	6.00	–
8 x 4	8.625	6.875	0.875	7.00	4.500	3.152	0.674	6.12	–
8 x 5	8.625	6.875	0.875	7.00	5.562	4.062	0.750	6.38	–
8 x 6	8.625	6.875	0.875	7.00	6.625	4.897	0.864	6.62	–
10 x 4	10.750	8.750	1.000	8.50	4.500	3.152	0.674	7.25	–
10 x 5	10.750	8.750	1.000	8.50	5.562	4.062	0.750	7.50	–
10 x 6	10.750	8.750	1.000	8.50	6.625	4.897	0.864	7.62	–
10 x 8	10.750	8.750	1.000	8.50	8.625	6.875	0.875	8.00	–
12 x 4	12.750	10.750	1.000	–	4.500	3.152	0.674	–	–
12 x 5	12.750	10.750	1.000	10.00	5.562	4.062	0.750	8.50	–
12 x 6	12.750	10.750	1.000	10.00	6.625	4.897	0.864	8.62	–
12 x 8	12.750	10.750	1.000	10.00	8.625	6.875	0.875	9.00	–
12 x 10	12.750	10.750	1.000	10.00	10.750	8.750	1.000	9.50	–

**\* Dimensions conform to ASME B16.9 & material conforms to ASTM SA-234 Grade B.**