



3-PC. SCREWED END BALL VALVE

SM2300CT/SM3300ST

FEATURES



- Full Port 1/4" through 4"
- Working Pressure 1000 WOG
- Working Temperature -4° F through 392°F
- Blow-out Proof Stem
- Locking Device
- SM2300CT: A216-WCB • SM3300ST: A351-CF8M

SPECIFICATIONS

- Thread Ends Conform to ASME/ANSI B1.20.1 (NPT)
- API-598
- NACE MR-0175 STANDARD

Materials of Construction

Item	Part	Material Spec	
1	BODY	ASTM A216-WCB	ASTM A351-CF8M
2	CAP		
3	BALL	ASTM A351-CF8M	
4	STEM	ASTM A276-316	
5	SEAT	RTFE	
6	GASKET	PTFE	
7	PACKING	PTFE	
8	THRUST WASHER	PTFE	
9	GLANDNUT	AISI 304	
10	SPRING WASHER		
11	STEMNUT		
12	BOLT		
13	NUT		
14	SPRING WASHER		
15	HANDLE	Stainless Steel	
16	HANDLE SLEEVE	PVC	
17	LATCH LOCK	Stainless Steel	

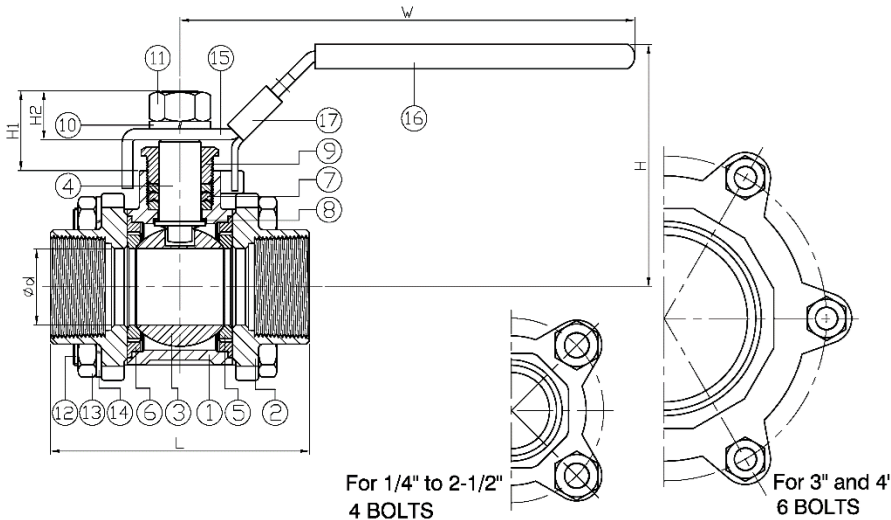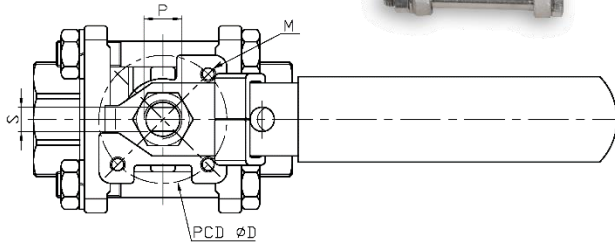

For 1/4" to 2-1/2"
4 BOLTS

For 3" and 4"
6 BOLTS

Dimensions (Inches)

NPS	d	L	H	W	D	M	P	S	H1	H2	ISO	Torque (in-lb)	Weight (lb)
1/4"	0.46	2.56	2.26	4.07	1.42	M5	3/8"-24UNF	0.2	0.76	0.53	F03	66.4	0.8
3/8"	0.49	2.56	2.26	4.07	1.42	M5	3/8"-24UNF	0.2	0.76	0.53	F03	66.4	0.8
1/2"	0.59	2.56	2.42	4.07	1.42	M5	3/8"-24UNF	0.2	0.76	0.53	F03	66.4	1.2
3/4"	0.79	2.95	2.54	4.76	1.42	M5	7/16"-20UNF	0.26	0.92	0.63	F03	66.4	1.6
1"	0.98	3.35	3.15	5.79	1.65	M5	7/16"-20UNF	0.31	1.01	0.64	F04	110.6	2.3
1-1/4"	1.26	3.98	3.35	5.79	1.65	M5	7/16"-20UNF	0.31	1.01	0.64	F04	132.8	3.6
1-1/2"	1.5	4.41	4.08	7.4	1.97	M6	1/2"-20UNF	0.39	1.17	0.79	F05	177	5.3
2"	1.97	5.12	4.36	7.4	1.97	M6	1/2"-20UNF	0.39	1.17	0.79	F05	221.3	7.9
2-1/2"	2.48	6.38	5.4	9.84	2.76	M8	3/4"-10UNC	0.47	1.55	1.08	F07	566.4	14.8
3"	2.99	7.4	5.74	9.84	2.76	M8	3/4"-10UNC	0.47	1.55	1.08	F07	752.3	21.6
4"	3.78	8.82	7.15	12.52	4.02	M10	1"-8UNC	0.63	2.11	1.57	F10	840.8	42.3

The information presented on this sheet is correct at the time of publication. Service Metal reserves the right to change design, and/or material specifications without notice.



PRESSURE-TEMPERATURE RATING

