




Caps
Schedule 40
Inches / Pounds

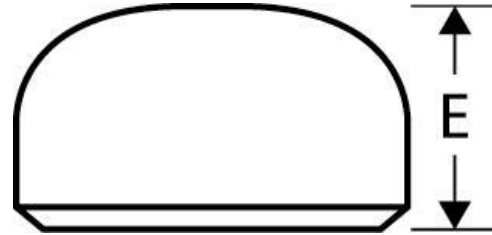

Nominal Pipe Size	Outside Diameter	Inside Diameter	Wall Thickness	Length (E)	Pipe Schedule	Approximate Weight (in Pounds)
1/2	0.84	0.622	0.109	1.00	STD/40	0.08
3/4	1.05	0.824	0.113	1.25	STD/40	0.14
1	1.32	1.049	0.133	1.50	STD/40	0.21
1 1/4	1.66	1.380	0.140	1.50	STD/40	0.33
1 1/2	1.90	1.610	0.145	1.50	STD/40	0.54
2	2.38	2.067	0.154	1.50	STD/40	0.8
2 1/2	2.88	2.469	0.203	1.50	STD/40	1
3	3.50	3.068	0.216	2.00	STD/40	1.7
3 1/2	4.00	3.548	0.226	2.50	STD/40	2.3
4	4.50	4.026	0.237	2.50	STD/40	2.8
5	5.56	5.047	0.258	3.00	STD/40	4.6
6	6.62	6.065	0.280	3.50	STD/40	6.9
8	8.62	7.981	0.322	4.00	STD/40	11.8
10	10.75	10.020	0.365	5.00	STD/40	20.8
12	12.75	11.938	0.406	6.00	40	33
14	14.00	13.124	0.438	6.50	40	43
16	16.00	15.000	0.500	7.00	XH/40	57
18	18.00	16.876	0.562	9.00	40	85
20	20.00	18.812	0.594	10.00	40	119
24	24.00	22.624	0.688	12.00	40	185

** Dimensions conform to ASME B16.9 & material conforms to ASTM SA-234 Grade B.*