




Caps  
**Schedule 80**  
Inches / Pounds

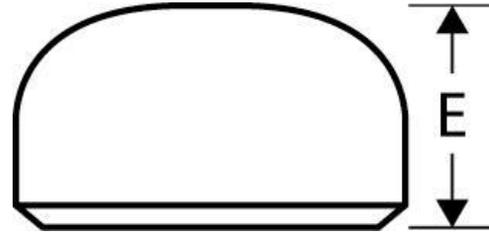

Nominal Pipe Size	Outside Diameter	Inside Diameter	Wall Thickness	Length (E)	Pipe Schedule	Approximate Weight (in Pounds)
1/2	0.84	0.546	0.147	1.00	XH/80	0.10
3/4	1.050	0.742	0.154	1.00	XH/80	0.16
1	1.315	0.957	0.179	1.50	XH/80	0.28
1 1/4	1.660	1.278	0.191	1.50	XH/80	0.48
1 1/2	1.900	1.500	0.200	1.50	XH/80	0.67
2	2.375	1.939	0.218	1.50	XH/80	0.92
2 1/2	2.875	2.323	0.276	1.50	XH/80	1.30
3	3.500	2.900	0.300	2.00	XH/80	2.10
3 1/2	4.000	3.364	0.318	2.50	XH/80	3.00
4	4.500	3.826	0.337	2.50	XH/80	3.50
5	5.563	4.813	0.375	3.00	XH/80	5.80
6	6.625	5.761	0.432	3.50	XH/80	9.30
8	8.625	7.625	0.500	4.00	XH/80	16
10	10.75	10.020	.365	6.00	80	26
12	12.75	11.938	0.406	7.00	80	38
14	14.00	13.124	0.438	7.50	80	47
16	16.00	15.000	0.500	8.00	80	57
18	18.00	16.876	0.562	9.00	80	78
20	20.00	18.812	0.594	10.00	80	100
24	24.00	22.624	0.688	12.00	80	145

*\* Dimensions conform to ASME B16.9 & material conforms to ASTM SA-234 Grade B.*