




Short Radius 90° Elbows
EXTRA HEAVY
Inches / Pounds

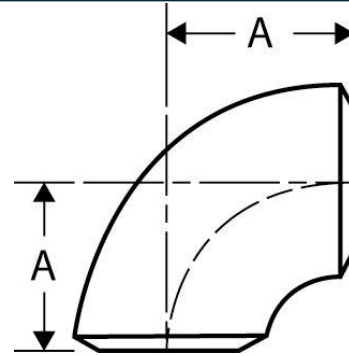

Nominal Pipe Size	Outside Diameter	Inside Diameter	Wall Thickness	Center to End (A)	Pipe Schedule	Approximate Weight (in Pounds)
1 ½	1.90	1.50	0.200	1.50	XH/80	0.75
2	2.38	1.94	0.218	2.00	XH/80	1.5
2 ½	2.88	2.32	0.276	2.50	XH/80	2.6
3	3.50	2.90	0.300	3.00	XH/80	3.8
3 ½	4.00	3.36	0.318	3.50	XH/80	5.4
4	4.50	3.83	0.337	4.00	XH/80	7.6
5	5.56	4.81	0.375	5.00	XH/80	13.8
6	6.63	5.76	0.432	6.00	XH/80	22.8
8	8.63	7.62	0.500	8.00	XH/80	47.3
10	10.75	9.75	0.500	10.00	XH/60	71
12	12.75	11.75	0.500	12.00	XH*	104
14	14.00	13.00	0.500	14.00	XH*	137
16	16.00	15.00	0.500	16.00	XH/40	171
18	18.00	17.00	0.500	18.00	XH*	214
20	20.00	19.00	0.500	20.00	XH/30	277
24	24.00	23.00	0.500	24.00	XH*	390
30	30.00	29.00	0.500	30.00	XH/20	634
36	36.00	35.00	0.500	36.00	XH/20	913
42	42.00	41.00	0.500	42.00	XH*	1,300
48	48.00	47.00	0.500	48.00	XH*	1,675

** XH* designates Extra Strong (extra strong wall). This size and thickness do not correspond to any pipe schedule number.*

** Dimensions conform to ASME B16.9 & material conforms to ASTM SA-234 Grade B.*