




Straight Tees
SCHEDULE 40
Inches / Pounds

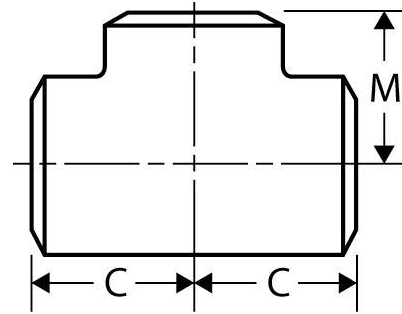

Nominal Pipe Size	Outside Diameter	Inside Diameter	Wall Thickness	Center To End (C)	Center To End (M)	Pipe Schedule	Approximate Weight (in Pounds)
1/2	0.84	0.622	0.109	1.00	1.00	STD/40	0.35
3/4	1.05	0.824	0.113	1.12	1.12	STD/40	0.50
1	1.32	1.049	0.133	1.50	1.50	STD/40	0.75
1 1/4	1.66	1.380	0.140	1.88	1.88	STD/40	1.3
1 1/2	1.90	1.610	0.145	2.25	2.25	STD/40	1.9
2	2.38	2.067	0.154	2.50	2.50	STD/40	3.2
2 1/2	2.88	2.469	0.203	3.00	3.00	STD/40	5.8
3	3.50	3.068	0.216	3.38	3.38	STD/40	7.2
3 1/2	4.00	3.548	0.226	3.75	3.75	STD/40	9.5
4	4.50	4.026	0.237	4.12	4.12	STD/40	12.7
5	5.56	5.047	0.258	4.88	4.88	STD/40	20.8
6	6.62	6.065	0.280	5.62	5.62	STD/40	33.1
8	8.62	7.981	0.322	7.00	7.00	STD/40	56.5
10	10.75	10.020	0.365	8.50	8.50	STD/40	90.9
12	12.750	11.938	0.406	10.00	10.00	40	147
14	14.000	13.124	0.438	11.00	11.00	40	189
16	16.000	15.000	0.500	12.00	12.00	XH/40	275
18	18.000	16.876	0.562	13.50	13.50	40	408
20	20.000	18.812	0.594	15.00	15.00	40	554
24	24.000	22.624	0.688	17.00	17.00	40	932
30	32.000	30.624	0.688	22.00	22.00	40	1532
34	34.000	32.624	0.688	25.00	25.00	40	2084
36	36.000	34.500	0.750	26.50	26.50	40	2588

** Dimensions conform to ASME B16.9 & material conforms to ASTM SA-234 Grade B.*